




THERMOSHRINKING

MOD.

AT530 DUO GLASS

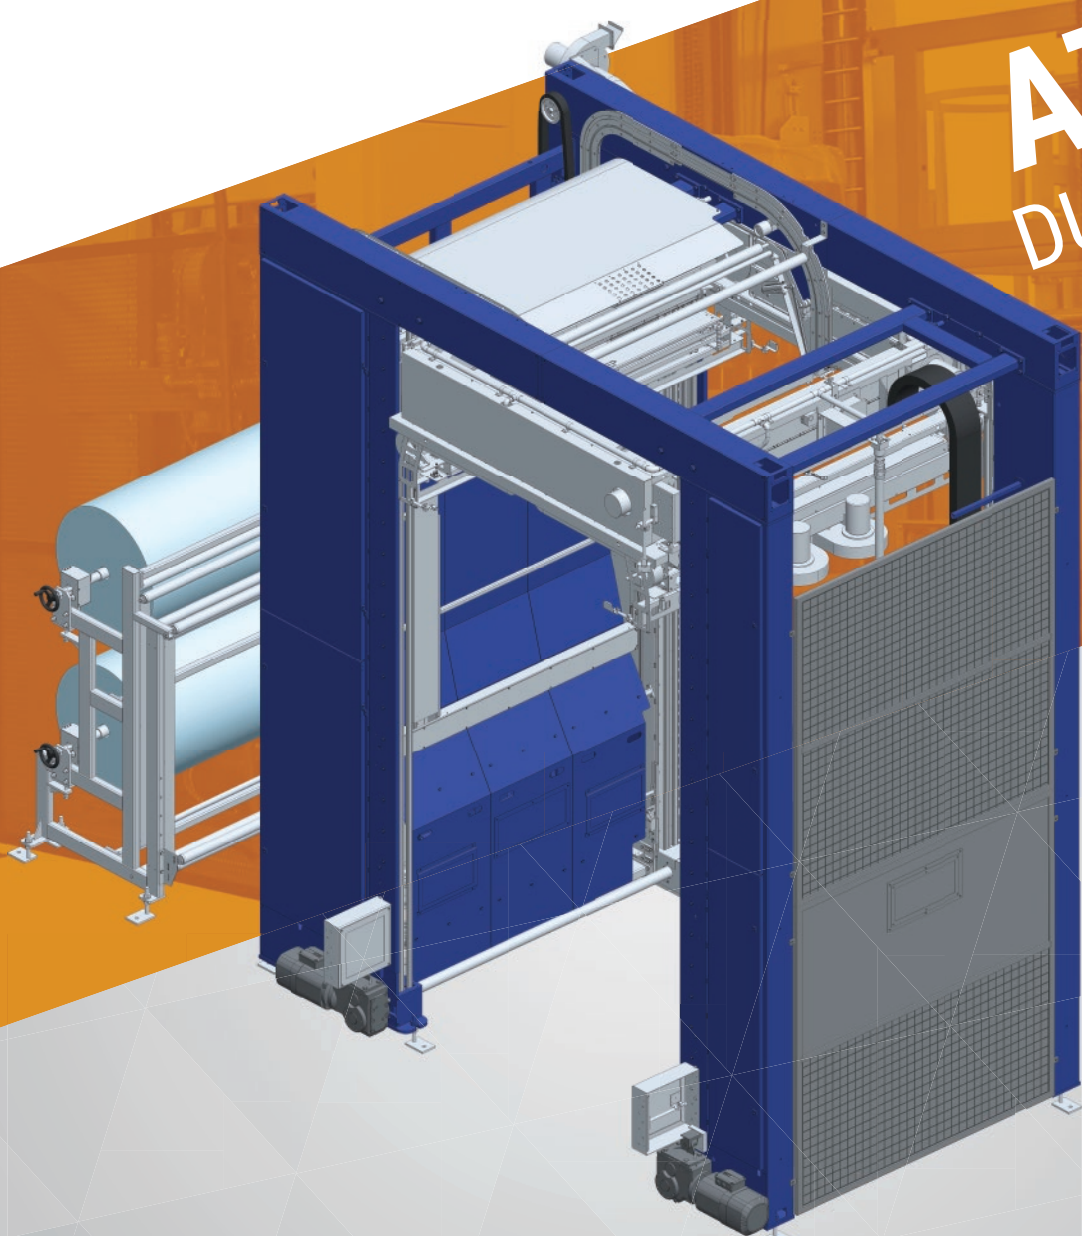

 **Applications**



Glass

- HIGH PERFORMANCE**
- PROTECTED AND STABLE LOADS**
- HIGH RELIABILITY & LOW MAINTENANCE**

AT530 DUO GLASS

AT530DUO_EN

The AT530 automatic hooding machine is a combined automatic machine which uses a single work station to shrink hood the products to be packaged; especially designed for the hollow glass industry. The machine uses coils of tubular thermoshrinking film with side gussets.

The coils can be 1, 2 or 3 depending on the chosen version. The film is shrunk on the product by a ring-like gas oven. All use and maintenance automatic and manual functions are controlled by a PLC. The operator needs to be present only to change the film coil.

Technical Data

| Power supply | |
|--|------------------------------|
| Voltage | 400 V (50Hz) |
| Installed power | ~ 23,0 kW |
| Air supply | |
| Pressure | 5,5 ÷ 7 bar |
| Consumption | 40 NL/Cycle |
| Gas supply | |
| Gas type | Propane or methane (*butane) |
| Pressure | 200 mbar -15% / +5% |
| Consumption | 0,14 Nme (methane) |
| Pack size L1200xW1000xH1500 w/th film 100µ | |
| Coil | |
| Film type | ∅ 1800 mm |
| Film Thickness | 80 ÷ 160µ |
| Pack size | |
| Length Medium / Maxi version | 1250 / 1550 mm |
| Width Medium / Maxi version | 1200 / 1500 mm |
| Height Medium / Maxi version | Max. 2700 mm |
| Production | |
| Capacity | 60 packs/hour |

Options


Gas pressure reducer kit (Max pressure input 4bar)

Gas pressure reducer kit (Max pressure input 8bar)



Shrink cycle detail

Standard machine dimensions

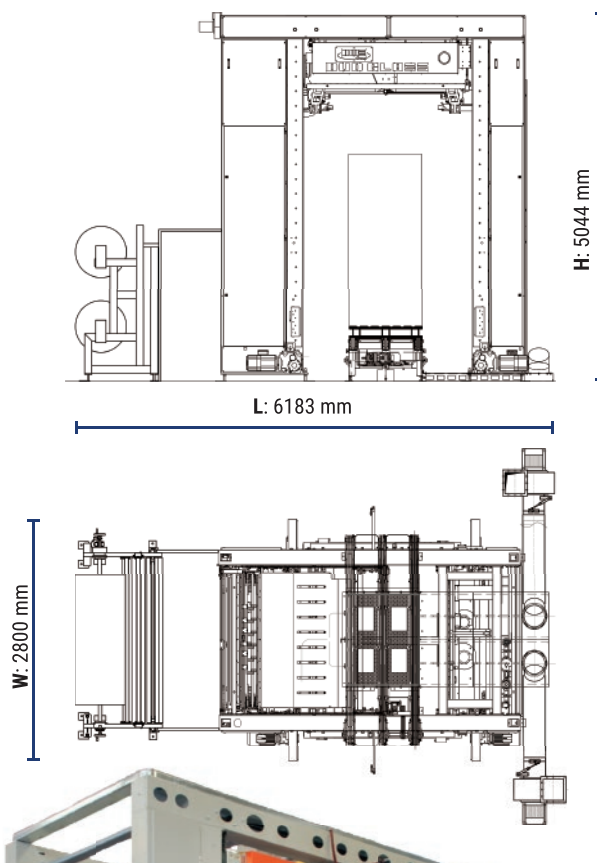

Overview



Officina Meccanica Sestese S.p.A.

Via Borgomanero, 44 - 28040 Paruzzaro (NO)

Tel. +39 0322 541411 Fax +39 0322 53157

www.omsspa.com

info@omsspa.com

Come parte della nostra politica di miglioramento continuo, ci riserviamo il diritto di modificare il design e le specifiche senza preavviso. Questo opuscolo è solo a scopo descrittivo. Alcuni degli articoli raffigurati in questa brochure sono opzionali e non di serie.